

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 0025

Roll No.

--	--	--	--	--	--	--	--	--	--

B. Tech.**(SEMESTER-IV) THEORY EXAMINATION, 2011-12****STRUCTURAL ANALYSIS - I****Time : 3 Hours]****[Total Marks : 100**

- Note :**
- (i) This question paper has **three** sections **A, B** and **C**.
 - (ii) Attempt **all** questions.
 - (iii) Marks and number of questions to be attempted from each section is mentioned before the section.
 - (iv) Assume missing data suitably. Illustrate the answers with suitable sketches.

SECTION - A

1. This section has **ten** parts of short answer type questions. Attempt all parts. **10 × 2 = 20**
- (a) Describe the static and kinematic indeterminacy.
 - (b) What do you mean by degree of indeterminacy ?
 - (c) Explain degree of freedom.
 - (d) List different types of pin jointed determinate trusses.
 - (e) Distinguish between plane and space trusses.
 - (f) What do you mean by compound and complex space trusses ?
 - (g) Enumerate the tension coefficient method for the analysis of space truss.
 - (h) State the Müller – Breslau principle of influence line.
 - (i) Define Betti's-Maxwell's reciprocal theorem with example.
 - (j) State and proof Castiglione's first theorem.

SECTION – B

2. Attempt any **five** parts of the following :

5 × 6 = 30

- (a) Analyze the plain truss as show in **Fig. 2a**. Assume that the cross-sectional area of all the members are same.

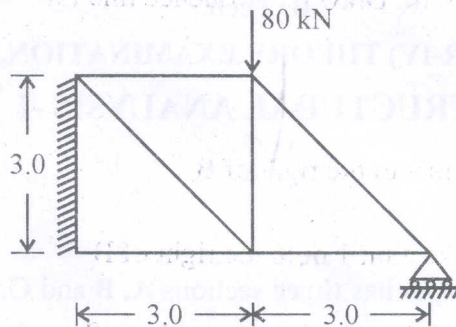


Fig. 2 (a)

- (b) Find the reaction components of the space truss shown in **Fig. 2b**. Assume that the cross-sectional area of all the members are same.

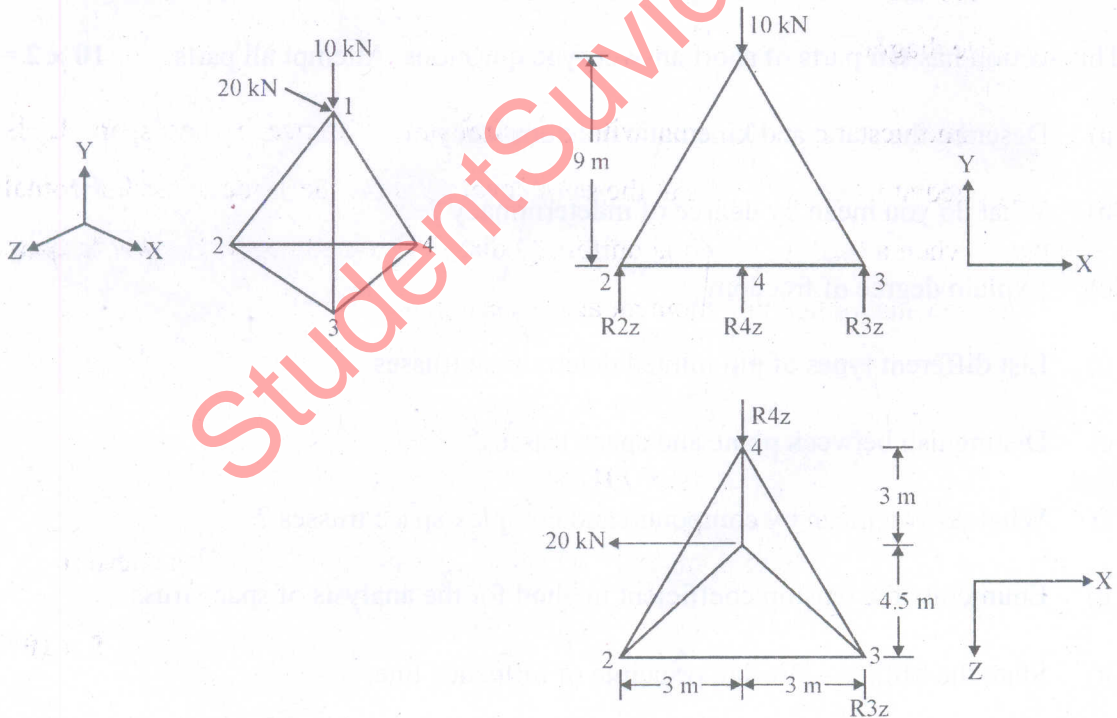


Fig. 2 (b)

(c) A uniformly distributed load of 1 kN/m run 6 m long crosses a girder of 16 m span. Construct the maximum shear force and bending moment diagrams and calculate the values at sections 3 m, 5 m and 8 m from the left hand support.

(d) A beam ABC is supported at A, B and C; and has a hinge at D distant from A. AB = 7 m and BC = 10 m. Draw the influence line for:

Reactions at A, B and C

Shear force at a point just to the right of B

Bending moment at a section 1 m to the right of B

(e) Using Müller-Breslau principle determine the influence line for R_A , R_B , V_C and M_C of singly supported beam AB of 8 m long. Section C is chosen at 5 m from left end A.

(f) Describe the concept of linear arch. State and explain the Eddy's theorem with suitable diagrams.

(g) A symmetrical parabolic arch with a central hinge, of rise 'r' and span 'L' is supported at its ends on pins at the same level. What is the value of the horizontal thrust when a load w, which is uniformly distributed load covers the whole span. Find the value of bending moment at any section of the arch.

SECTION – C

Question No. 3 to 7 has **three** parts each. Attempt any **two** parts from each question.

$$5 \times 10 = 50$$

3. (a) A three-hinged semi-circular arch of radius R carries a uniformly distributed load of intensity w per unit length over its entire horizontal span. Determine the reactions at supports and amount of maximum bending moment in the arch.

- (b) A three-hinged symmetric parabolic arch of span 16 m and rise 3 m, subjected to two rolling loads 40 kN and 80 kN at a gap of 2 m distance. The loads move from left to right. Determine the maximum positive moment and negative moment at a section 4 m from the left support.
- (c) A three hinged segmental arch of a circle has a span of 50 m and a rise of 8 m. A load of 100 kN acting at 15 m from right support. Find the horizontal thrust developed at the supports.

4. (a) A vertical load W is applied to the right cantilever frame shown in **Fig. 4a**. Assume constant flexural rigidity throughout the frame, using this theorem determine the horizontal and vertical displacements of point C. Neglect the axial deformations.

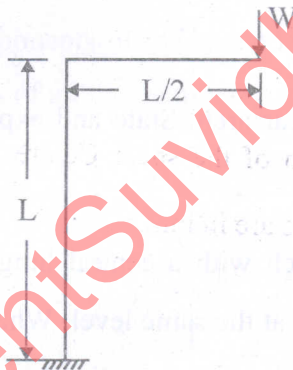


Fig. 4 (a)

- (b) A circular bar is bent into the shape of a half circular ring and supported in a vertical plane as shown in **Fig. 4b**. Determine the horizontal movement of point C and the vertical movement of point B. Use the strain energy method. Assume flexural rigidity being constant throughout.

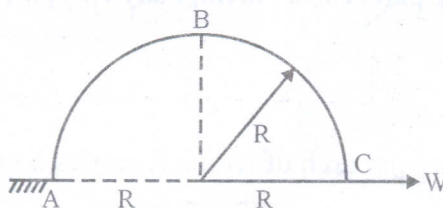


Fig. 4 (b)

- (c) A steel bar bent to the shape of **Fig. 4c** is fixed at A and carries a vertical load W at C. Calculate the vertical deflection of C. Assume constant EI throughout.

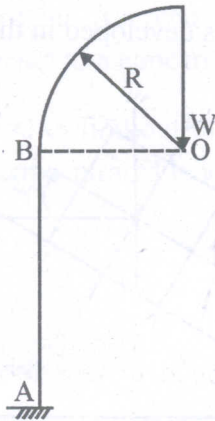


Fig. 4 (c)

5. (a) Determine the position of the shear Centre of the section of a beam shown in **Fig. 5a**. All dimensions are in mm.

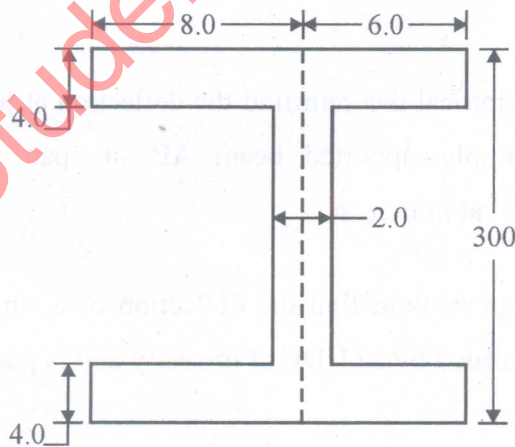


Fig. 5 (a)

- (b) A wooden beam of cross-section $100 \text{ mm} \times 150 \text{ mm}$ is used as shown in **Fig. 5b** to support a sloping Mangalore Tiled Roof. It has an effective span of 4 m and carries a uniformly distributed load of 3 kN/m acting vertically downward. Determine the maximum stresses developed in the beam.

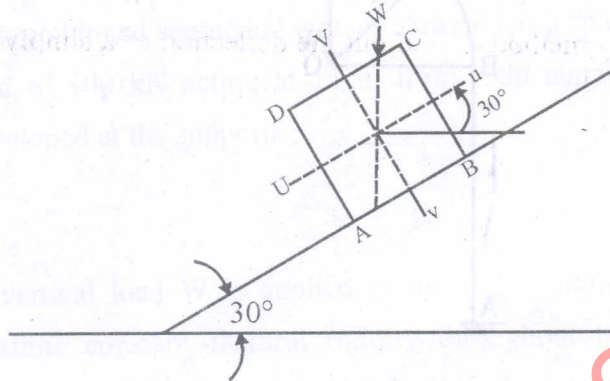


Fig. 5 (b)

- (c) A $60 \text{ mm} \times 40 \text{ mm} \times 6 \text{ mm}$ unequal angle is placed with the longer leg vertical and is used as a beam simply supported at the ends, over a span of 2 m. If it carries a uniformly distributed load of such magnitude as to produce the maximum bending moment of 0.12 kN-m , determine the maximum deflection of the beam. Take $E = 2.1 \times 10^5 \text{ N/mm}^2$.
6. (a) Using Maxwell's reciprocal theorem find the deflection at point D, 4 m from left support A, of a simply-supported beam AB of span 10 m, loaded by a concentrated load 'W' at mid-span.
- (b) Using conjugate beam method find the deflection of a simply supported beam, AB of length 10 m, loaded by an UDL of intensity $20 \text{ kN per unit run}$.
- (c) ABC is a cantilever beam of span 'L' whose end A is fixed, and loaded by a concentrated load 'W' at B at ' $L/2$ ' distance from left end A. Find the deflection at free end C. Use unit load method.

7. (a) Distinguish between symmetrical and un-symmetrical bending. Describe the analytical method of location of neutral axis in the case of un-symmetrical bending.
- (b) Determine the rotation of the free end of a cantilever curved beam of quarter circle of radius ' R ' subjected to a concentrated load ' W ' at the free end.
- (c) Explain the energy method to find out the deflection of a simply supported beam of span ' L ', loaded by a concentrated load ' W ' at mid span.