

Index

- Break Statement
- Continue Statement


StudentSuvidha.com

Break Statement

- *C break* statement is used to terminate any type of loop such as while loop, do while loop and for loop.
- *C break* statement terminates the loop body immediately and passes control to the next statement after the loop.
- Common uses of the **break** statement
 - Escape early from a loop
 - Skip the remainder of a **switch** structure

Break Statement(Cont....)

- Flowchart for break.

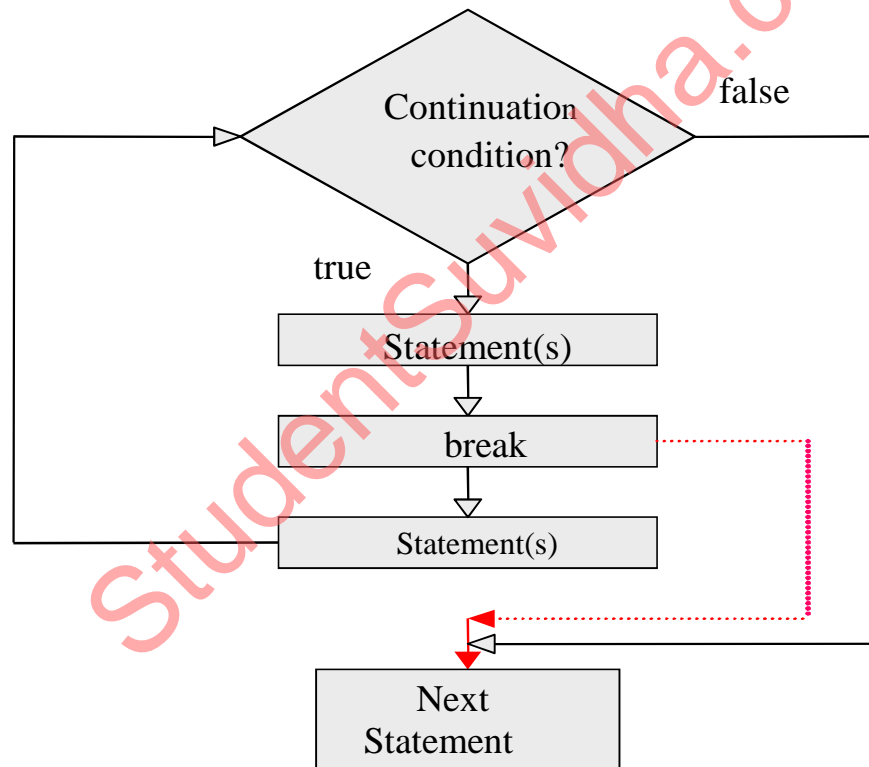


BESU,  SUMMER-07

Continue Statement

- *C continue* statement is used to skip over the rest of the current iteration in .
- After *continue* statement, the control returns to the top of the loop.

Continue Statement(Cont....)

- Flowchart for continue.

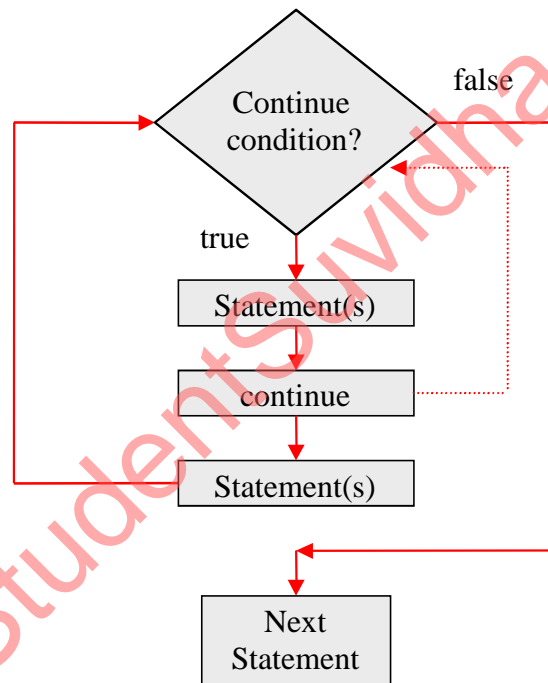

Assignment

- Differentiate between if-else and switch-case statement.